

LADDER MINOR HOIST 440 lbs

- Easy installation.
- Lighter and portable driving unit.
- Available in vertical or inclined version.
- Trolley safety brake.
- Bottom and top limit switch.
- Slack cable detection switch.



Av. Francesc Marimon, 138 Apdo. 2
08292 Esparreguera
Barcelona (Espagne)

camac@camacsa.com

T. +34 937 77 10 50
F. +34 937 77 12 43

www.camacsa.com



PLAT. TRANSP. PLACAS SOLARES
SOLAR PANEL TRANSP. PLAT.



JAJULA ESTÁNDAR
STANDARD CAGE
(600 mm. x 780 mm. x 690 mm.)



CONTENEDOR AUTOMÁTICO (70 L)
AUTOMATIC CONTAINER (70 L)



TRAMO ARTICULADO
ARTICULATED SECTION




JAJULA ESPECIAL
SPECIAL CAGE (480 mm. x 1,200 mm. x 1,100 mm.)




TRAMO FINAL
FINAL SECTION



JAJULA ALUMINIO
ALUMINUM CAGE (900 mm. x 1,160 mm. x 830 mm.)

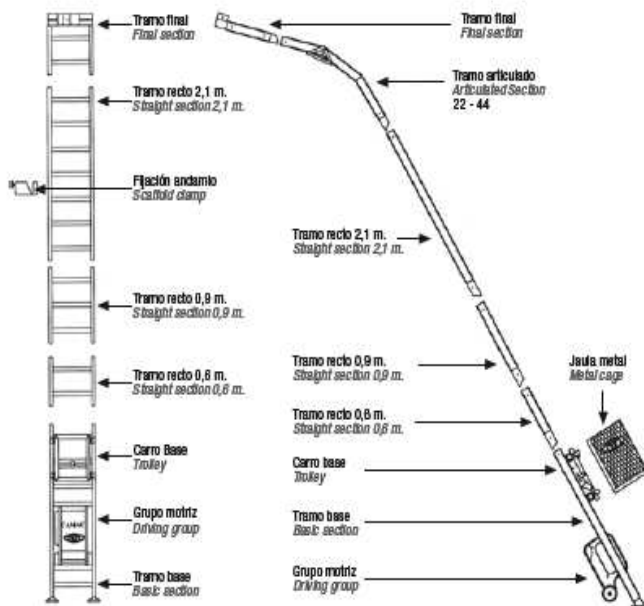

FIJACIÓN ANDAMIO
SCAFFOLDING CLAMP

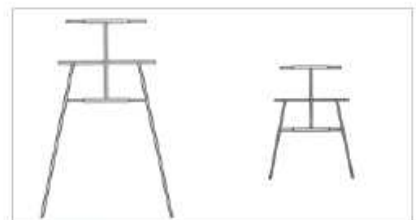

APOYO INTERMEDIO
INTERMEDIATE SUPPORT

APOYO FINAL
FINAL SUPPORT

MONTE CHARGE – CHARACTERISTICS

Lifting power	440 Lb
Lifting speed	72 ft/min
Motor powering rating	2 CV
Single-phase motor voltage	220 V or 110 V
Handling voltage	48 V
Cable diameter	5 mm
Cable rupture load	4.365 Lb
Vertical maximum length	131 Ft
Maximum inclined position length	65 Ft